

UTDSX



Work Material																	
Structural Steels	Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels				Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic Materials)
				~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC										
SS400	S45C S55C	SK / SCM SUS	NAK HPM	~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC									
●	●	●	○	Contact sales when drilling over 45HRC.				○	●		○			○	○		

Unit (mm)

Model Number	Diameter φD	Flute Length ℓ	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
UTDSX 2030-015	0.3	1.5	38	3	3,470
UTDSX 2035-018	0.35	1.8	38	3	3,860
UTDSX 2040-020	0.4	2	38	3	3,470
UTDSX 2045-023	0.45	2.3	38	3	3,860
UTDSX 2050-025	0.5	2.5	38	3	3,860
UTDSX 2055-028	0.55	2.8	38	3	3,070
UTDSX 2060-030	0.6	3	38	3	2,670
UTDSX 2065-033	0.65	3.3	38	3	3,070
UTDSX 2070-035	0.7	3.5	38	3	2,670
UTDSX 2075-038	0.75	3.8	38	3	3,070
UTDSX 2080-040	0.8	4	38	3	2,670
UTDSX 2085-043	0.85	4.3	38	3	3,070
UTDSX 2090-045	0.9	4.5	38	3	2,670
UTDSX 2095-048	0.95	4.8	38	3	3,070
UTDSX 2100-050	1	5	38	3	2,480
UTDSX 2105-053	1.05	5.3	38	3	2,480
UTDSX 2110-055	1.1	5.5	38	3	2,480
UTDSX 2115-058	1.15	5.8	38	3	2,480
UTDSX 2120-060	1.2	6	38	3	2,480
UTDSX 2125-063	1.25	6.3	38	3	2,480
UTDSX 2130-065	1.3	6.5	38	3	2,480
UTDSX 2135-068	1.35	6.8	38	3	2,480
UTDSX 2140-070	1.4	7	38	3	2,480
UTDSX 2145-073	1.45	7.3	38	3	2,480
UTDSX 2150-075	1.5	7.5	38	3	2,480
UTDSX 2155-078	1.55	7.8	38	3	2,480
UTDSX 2160-080	1.6	8	38	3	2,480
UTDSX 2165-083	1.65	8.3	38	3	2,670
UTDSX 2170-085	1.7	8.5	38	3	2,670
UTDSX 2175-088	1.75	8.8	38	3	2,670
UTDSX 2180-090	1.8	9	38	3	2,670
UTDSX 2185-093	1.85	9.3	38	3	2,670
UTDSX 2190-095	1.9	9.5	38	3	2,670
UTDSX 2195-098	1.95	9.8	38	3	2,670
UTDSX 2200-100	2	10	38	3	2,670

Features

A highly efficient and economic drill for both mass and prototype production of parts.

UT MICRO COAT offers excellent performance for cutting soft materials.

The new drill design and X thinning offer stable drilling performance with increased tool life.


The 130° point angle ensures reduced burring of the drilled hole.

The high rigidity short flute is perfect for high accuracy drilling and pilot hole drilling.


Diameter Tolerance: 0/-0.01 mm

Point Angle: 130°

■ $\phi 0.3 \sim \phi 0.65$



■ $\phi 0.7 \sim \phi 2.0$




Drilling Conditions for UTDSX

WORK MATERIAL	STRUCTURAL STEELS SS400		CARBON STEELS S50C		ALLOY STEELS SCM / SUS		ALUMINUM ALLOYS A5052 / ADC12	
Velocity	Vc=20~35 m/min		Vc=20~35 m/min		Vc=15~20 m/min		Vc=20~60 m/min	
Diameter (mm)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)
0.3	20,000	100	20,000	100	16,000	80	20,000	200
0.4	17,400	130	17,400	180	12,000	90	20,000	440
0.5	15,900	150	15,900	250	9,500	100	20,000	680
0.6	14,100	170	14,100	300	8,000	110	20,000	920
0.7	12,800	180	12,800	340	6,700	110	20,000	1,160
0.8	11,900	200	11,900	380	6,300	120	20,000	1,400
0.9	10,500	200	10,500	390	6,000	130	17,500	1,430
1	9,500	200	9,500	400	6,000	150	16,000	1,500
1.5	7,300	220	7,300	500	4,500	180	13,000	1,960
2	5,600	230	5,600	560	3,000	160	9,500	2,030
Peck Amount	0.3D		0.5D		0.3D		1.0D	

Note:

- Recommend shallower drilling than flute length (under $\phi 1:1D$, $\phi 1$ and over: $0.5D$).
- Recommend water soluble or oil coolant.
- Recommend oil coolant for Titanium Alloys and Heat Resistant Alloys.



$\phi 3$ mm Shank
V Series

UDC-PCD
Series

CBN
Series

Square

Long Neck
Square

Radius

Long Neck
Radius

Taper Neck
Radius

Ball / Long
Shank Ball

Long Neck
Ball

Taper Neck
Ball

Taper

Barrel

Spiral
V Cutter




Drill

Technical Data

Size $\phi 0.1 \sim \phi 3$ **C-UMD**

Material Applications (★ Highly Recommended ● Recommended ○ Suggested)

Work Material												
Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels					Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics
S45C S55C	SK / SCM SUS	NAK HPM	~50HRC	~55HRC	~60HRC	~65HRC	~70HRC					
●	●	○	Contact sales when drilling over 45HRC.					○	●		○	

■ $\phi 0.1 \sim \phi 0.25$ ■ $\phi 0.26 \sim \phi 0.65$ ■ $\phi 0.66 \sim \phi 3$ Actual tool geometries for some specifications and tolerances may differ from above drawings. $\phi 3$ is Straight type.Diameter Tolerance : $\phi D \leq \phi 3$
Point Angle : 150° : $\phi D -0.01$

Total 225 models

Unit (mm)

Model Number	Diameter ϕD	Flute Length ℓ	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
C-UMD 2010-012	0.1	1.2	38	3	5,500
C-UMD 2011-012	0.11	1.2	38	3	6,050
C-UMD 2012-014	0.12	1.4	38	3	6,050
C-UMD 2013-014	0.13	1.4	38	3	6,050
C-UMD 2014-014	0.14	1.4	38	3	6,050
C-UMD 2015-020	0.15	2	38	3	5,060
C-UMD 2016-020	0.16	2	38	3	5,390
C-UMD 2017-020	0.17	2	38	3	5,390
C-UMD 2018-020	0.18	2	38	3	5,390
C-UMD 2019-020	0.19	2	38	3	5,390
C-UMD 2020-025	0.2	2.5	38	3	4,400
C-UMD 2021-025	0.21	2.5	38	3	4,950
C-UMD 2022-025	0.22	2.5	38	3	4,950
C-UMD 2023-025	0.23	2.5	38	3	4,950
C-UMD 2024-025	0.24	2.5	38	3	4,950
C-UMD 2025-030	0.25	3	38	3	4,950
C-UMD 2026-030	0.26	3	38	3	4,730
C-UMD 2027-030	0.27	3	38	3	4,730
C-UMD 2028-030	0.28	3	38	3	4,730
C-UMD 2029-030	0.29	3	38	3	4,730
C-UMD 2030-050	0.3	5	38	3	3,850
C-UMD 2031-050	0.31	5	38	3	4,730
C-UMD 2032-050	0.32	5	38	3	4,730
C-UMD 2033-050	0.33	5	38	3	4,730

Unit (mm)

Model Number	Diameter ϕD	Flute Length ℓ	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
C-UMD 2034-050	0.34	5	38	3	4,730
C-UMD 2035-060	0.35	6	38	3	4,290
C-UMD 2036-060	0.36	6	38	3	4,730
C-UMD 2037-060	0.37	6	38	3	4,730
C-UMD 2038-060	0.38	6	38	3	4,730
C-UMD 2039-060	0.39	6	38	3	4,730
C-UMD 2040-070	0.4	7	38	3	3,850
C-UMD 2041-070	0.41	7	38	3	4,730
C-UMD 2042-070	0.42	7	38	3	4,730
C-UMD 2043-070	0.43	7	38	3	4,730
C-UMD 2044-070	0.44	7	38	3	4,730
C-UMD 2045-070	0.45	7	38	3	4,290
C-UMD 2046-070	0.46	7	38	3	4,730
C-UMD 2047-070	0.47	7	38	3	4,730
C-UMD 2048-070	0.48	7	38	3	4,730
C-UMD 2049-070	0.49	7	38	3	4,730
C-UMD 2050-070	0.5	7	38	3	4,290
C-UMD 2051-070	0.51	7	38	3	4,290
C-UMD 2052-070	0.52	7	38	3	4,290
C-UMD 2053-070	0.53	7	38	3	4,290
C-UMD 2054-070	0.54	7	38	3	4,290
C-UMD 2055-070	0.55	7	38	3	3,410
C-UMD 2056-070	0.56	7	38	3	4,290
C-UMD 2057-070	0.57	7	38	3	4,290

Next Page ➡

Unit (mm)

Model Number	Diameter ϕD	Flute Length ℓ	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
C-UMD 2058-070	0.58	7	38	3	4,290
C-UMD 2059-070	0.59	7	38	3	4,290
C-UMD 2060-070	0.6	7	38	3	2,970
C-UMD 2061-070	0.61	7	38	3	4,290
C-UMD 2062-070	0.62	7	38	3	4,290
C-UMD 2063-070	0.63	7	38	3	4,290
C-UMD 2064-070	0.64	7	38	3	4,290
C-UMD 2065-070	0.65	7	38	3	3,410
C-UMD 2066-070	0.66	7	38	3	4,290
C-UMD 2067-070	0.67	7	38	3	4,290
C-UMD 2068-070	0.68	7	38	3	4,290
C-UMD 2069-070	0.69	7	38	3	4,290
C-UMD 2070-080	0.7	8	38	3	2,970
C-UMD 2071-080	0.71	8	38	3	4,290
C-UMD 2072-080	0.72	8	38	3	4,290
C-UMD 2073-080	0.73	8	38	3	4,290
C-UMD 2074-080	0.74	8	38	3	4,290
C-UMD 2075-080	0.75	8	38	3	3,410
C-UMD 2076-080	0.76	8	38	3	4,290
C-UMD 2077-080	0.77	8	38	3	4,290
C-UMD 2078-080	0.78	8	38	3	4,290
C-UMD 2079-080	0.79	8	38	3	4,290
C-UMD 2080-100	0.8	10	38	3	2,970
C-UMD 2081-100	0.81	10	38	3	4,290
C-UMD 2082-100	0.82	10	38	3	4,290
C-UMD 2083-100	0.83	10	38	3	4,290
C-UMD 2084-100	0.84	10	38	3	4,290
C-UMD 2085-100	0.85	10	38	3	3,410
C-UMD 2086-100	0.86	10	38	3	4,290
C-UMD 2087-100	0.87	10	38	3	4,290
C-UMD 2088-100	0.88	10	38	3	4,290
C-UMD 2089-100	0.89	10	38	3	4,290
C-UMD 2090-100	0.9	10	38	3	2,970
C-UMD 2091-100	0.91	10	38	3	4,290
C-UMD 2092-100	0.92	10	38	3	4,290
C-UMD 2093-100	0.93	10	38	3	4,290
C-UMD 2094-100	0.94	10	38	3	4,290
C-UMD 2095-100	0.95	10	38	3	3,410
C-UMD 2096-100	0.96	10	38	3	4,290
C-UMD 2097-100	0.97	10	38	3	4,290
C-UMD 2098-100	0.98	10	38	3	4,290
C-UMD 2099-100	0.99	10	38	3	4,290
C-UMD 2100-100	1	10	38	3	2,750
C-UMD 2101-100	1.01	10	38	3	3,410
C-UMD 2102-100	1.02	10	38	3	3,410
C-UMD 2103-100	1.03	10	38	3	3,410

Unit (mm)

Model Number	Diameter ϕD	Flute Length ℓ	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
C-UMD 2104-100	1.04	10	38	3	3,410
C-UMD 2105-100	1.05	10	38	3	2,750
C-UMD 2106-100	1.06	10	38	3	3,410
C-UMD 2107-100	1.07	10	38	3	3,410
C-UMD 2108-100	1.08	10	38	3	3,410
C-UMD 2109-100	1.09	10	38	3	3,410
C-UMD 2110-100	1.1	10	38	3	2,750
C-UMD 2111-100	1.11	10	38	3	3,410
C-UMD 2112-100	1.12	10	38	3	3,410
C-UMD 2113-100	1.13	10	38	3	3,410
C-UMD 2114-100	1.14	10	38	3	3,410
C-UMD 2115-100	1.15	10	38	3	2,750
C-UMD 2116-100	1.16	10	38	3	3,410
C-UMD 2117-100	1.17	10	38	3	3,410
C-UMD 2118-100	1.18	10	38	3	3,410
C-UMD 2119-100	1.19	10	38	3	3,410
C-UMD 2120-100	1.2	10	38	3	2,750
C-UMD 2121-100	1.21	10	38	3	3,410
C-UMD 2122-100	1.22	10	38	3	3,410
C-UMD 2123-100	1.23	10	38	3	3,410
C-UMD 2124-100	1.24	10	38	3	3,410
C-UMD 2125-100	1.25	10	38	3	2,750
C-UMD 2126-100	1.26	10	38	3	3,410
C-UMD 2127-100	1.27	10	38	3	3,410
C-UMD 2128-100	1.28	10	38	3	3,410
C-UMD 2129-100	1.29	10	38	3	3,410
C-UMD 2130-100	1.3	10	38	3	2,750
C-UMD 2131-100	1.31	10	38	3	3,410
C-UMD 2132-100	1.32	10	38	3	3,410
C-UMD 2133-100	1.33	10	38	3	3,410
C-UMD 2134-100	1.34	10	38	3	3,410
C-UMD 2135-100	1.35	10	38	3	2,750
C-UMD 2136-100	1.36	10	38	3	3,410
C-UMD 2137-100	1.37	10	38	3	3,410
C-UMD 2138-100	1.38	10	38	3	3,410
C-UMD 2139-100	1.39	10	38	3	3,410
C-UMD 2140-100	1.4	10	38	3	2,750
C-UMD 2141-100	1.41	10	38	3	3,410
C-UMD 2142-100	1.42	10	38	3	3,410
C-UMD 2143-100	1.43	10	38	3	3,410
C-UMD 2144-100	1.44	10	38	3	3,410
C-UMD 2145-100	1.45	10	38	3	2,750
C-UMD 2146-100	1.46	10	38	3	3,410
C-UMD 2147-100	1.47	10	38	3	3,410
C-UMD 2148-100	1.48	10	38	3	3,410
C-UMD 2149-100	1.49	10	38	3	3,410

3mm Shank
V SeriesUDC-PCD
SeriesCBN
Series

Square

Long Neck
Square

Radius

Long Neck
RadiusTaper Neck
RadiusBall / Long
Shank BallLong Neck
BallTaper Neck
Ball

Taper

Barrel

Spiral
V Cutter

Drill

Technical Data

Next Page ➡

Unit (mm)

Model Number	Diameter ϕD	Flute Length ℓ	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
C-UMD 2150-100	1.5	10	38	3	2,750
C-UMD 2151-100	1.51	10	38	3	3,410
C-UMD 2152-100	1.52	10	38	3	3,410
C-UMD 2153-100	1.53	10	38	3	3,410
C-UMD 2154-100	1.54	10	38	3	3,410
C-UMD 2155-100	1.55	10	38	3	2,750
C-UMD 2156-100	1.56	10	38	3	3,410
C-UMD 2157-100	1.57	10	38	3	3,410
C-UMD 2158-100	1.58	10	38	3	3,410
C-UMD 2159-100	1.59	10	38	3	3,410
C-UMD 2160-120	1.6	12	38	3	2,750
C-UMD 2161-120	1.61	12	38	3	3,630
C-UMD 2162-120	1.62	12	38	3	3,630
C-UMD 2163-120	1.63	12	38	3	3,630
C-UMD 2164-120	1.64	12	38	3	3,630
C-UMD 2165-120	1.65	12	38	3	2,970
C-UMD 2166-120	1.66	12	38	3	3,630
C-UMD 2167-120	1.67	12	38	3	3,630
C-UMD 2168-120	1.68	12	38	3	3,630
C-UMD 2169-120	1.69	12	38	3	3,630
C-UMD 2170-120	1.7	12	38	3	2,970
C-UMD 2171-120	1.71	12	38	3	3,630
C-UMD 2172-120	1.72	12	38	3	3,630
C-UMD 2173-120	1.73	12	38	3	3,630
C-UMD 2174-120	1.74	12	38	3	3,630
C-UMD 2175-120	1.75	12	38	3	2,970
C-UMD 2176-120	1.76	12	38	3	3,630
C-UMD 2177-120	1.77	12	38	3	3,630
C-UMD 2178-120	1.78	12	38	3	3,630
C-UMD 2179-120	1.79	12	38	3	3,630
C-UMD 2180-120	1.8	12	38	3	2,970
C-UMD 2181-120	1.81	12	38	3	3,630
C-UMD 2182-120	1.82	12	38	3	3,630
C-UMD 2183-120	1.83	12	38	3	3,630
C-UMD 2184-120	1.84	12	38	3	3,630
C-UMD 2185-120	1.85	12	38	3	2,970
C-UMD 2186-120	1.86	12	38	3	3,630
C-UMD 2187-120	1.87	12	38	3	3,630
C-UMD 2188-120	1.88	12	38	3	3,630
C-UMD 2189-120	1.89	12	38	3	3,630
C-UMD 2190-120	1.9	12	38	3	2,970
C-UMD 2191-120	1.91	12	38	3	3,630
C-UMD 2192-120	1.92	12	38	3	3,630

Unit (mm)

Model Number	Diameter ϕD	Flute Length ℓ	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
C-UMD 2193-120	1.93	12	38	3	3,630
C-UMD 2194-120	1.94	12	38	3	3,630
C-UMD 2195-120	1.95	12	38	3	2,970
C-UMD 2196-120	1.96	12	38	3	3,630
C-UMD 2197-120	1.97	12	38	3	3,630
C-UMD 2198-120	1.98	12	38	3	3,630
C-UMD 2199-120	1.99	12	38	3	3,630
C-UMD 2200-120	2	12	38	3	2,970
C-UMD 2205-120	2.05	12	38	3	3,850
C-UMD 2210-120	2.1	12	38	3	3,190
C-UMD 2212-120	2.12	12	38	3	3,190
C-UMD 2213-120	2.13	12	38	3	3,190
C-UMD 2214-120	2.14	12	38	3	3,190
C-UMD 2215-120	2.15	12	38	3	3,850
C-UMD 2220-120	2.2	12	38	3	3,190
C-UMD 2225-120	2.25	12	38	3	3,850
C-UMD 2229-120	2.29	12	38	3	3,190
C-UMD 2230-120	2.3	12	38	3	3,190
C-UMD 2231-120	2.31	12	38	3	3,190
C-UMD 2232-120	2.32	12	38	3	3,190
C-UMD 2235-120	2.35	12	38	3	3,850
C-UMD 2239-120	2.39	12	38	3	3,190
C-UMD 2240-120	2.4	12	38	3	3,190
C-UMD 2241-120	2.41	12	38	3	3,190
C-UMD 2242-120	2.42	12	38	3	3,190
C-UMD 2245-120	2.45	12	38	3	3,850
C-UMD 2250-120	2.5	12	38	3	3,190
C-UMD 2255-120	2.55	12	38	3	3,850
C-UMD 2256-120	2.56	12	38	3	3,190
C-UMD 2257-120	2.57	12	38	3	3,190
C-UMD 2260-120	2.6	12	38	3	3,190
C-UMD 2265-120	2.65	12	38	3	3,850
C-UMD 2270-120	2.7	12	38	3	3,190
C-UMD 2275-120	2.75	12	38	3	3,850
C-UMD 2277-120	2.77	12	38	3	3,190
C-UMD 2278-120	2.78	12	38	3	3,190
C-UMD 2279-120	2.79	12	38	3	3,190
C-UMD 2280-120	2.8	12	38	3	3,190
C-UMD 2285-120	2.85	12	38	3	3,850
C-UMD 2290-120	2.9	12	38	3	3,190
C-UMD 2295-120	2.95	12	38	3	3,850
C-UMD 2300-120	3	12	38	3	3,190

$\phi 3\text{mm}$ Shank
V Series

UDC-PCD
Series

CBN
Series

Square

Long Neck
Square

Radius

Long Neck
Radius

Taper Neck
Radius

Ball / Long
Shank Ball

Long Neck
Ball

Taper Neck
Ball

Taper

Barrel

Spiral
V Cutter

Drill

Technical Data

Drilling Conditions for C-UMD

WORK MATERIAL	CARBON STEELS S45C / S50C (~225HB)		ALLOY STEELS SK / SCM / SUS (225~325HB)		PREHARDENED STEELS HARDENED STEELS NAK / SKD (30~45HRC)		ALUMINUM ALLOYS A5052 etc.	
Velocity	Vc=25~40 m/min		Vc=15~25 m/min		Vc=10~15 m/min		Vc=20~60 m/min	
Diameter (mm)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)
0.3	20,000	40	15,900	30	10,600	10	20,000	400
0.4	17,400	50	11,800	40	8,000	20	19,900	690
0.5	15,900	80	9,500	50	6,400	30	20,000	1,000
0.6	14,100	80	7,900	40	5,300	20	19,900	1,050
0.7	12,800	90	6,800	50	4,500	20	19,900	1,120
0.8	11,900	100	6,000	50	4,000	20	19,900	1,190
0.9	10,500	100	6,200	50	3,500	20	17,600	1,220
1	9,500	100	6,400	60	3,200	20	15,900	1,270
2	5,600	170	3,200	100	1,600	20	9,500	950
3	3,700	150	2,700	110	1,600	20	6,400	640

Note:

- Recommend step amount 0.1D-0.2D. Recommend 0.2D-0.5D for Aluminum Alloys.
- Recommend water soluble or oil coolant.
- Recommend oil coolant for Titanium Alloys and Heat Resistant Alloys.

Ø3mm Shank
V Series

UDC-PCD
Series

CBN
Series

Square

Square
Long Neck
Square

Radius

Radius
Long Neck
Radius
Taper Neck
Radius

Ball

Ball / Long
Shank Ball
Long Neck
Ball
Taper Neck
Ball

Taper

Taper

Barrel

Barrel

Spiral

Spiral
V Cutter

Drill

Technical Data

Drilling Example 1

SUS304

Comments

Tip Damage:

Damage by chipping can be seen on the Carbide Drill. The High-Speed Steel Drill exhibits wear on the top chisel line and corners. The High-Speed Steel Drill also has the work material adhering to it.

Hole Position:


The solid carbide drill has minimal deflection when compared to a High Speed steel model, through the entire drilling cycle.

Drilling Condition

Tool:	$\phi 0.6 \times$ Flute Length 7mm
Work Material:	SUS304 (1.4301)
Spindle Speed:	8,000 min ⁻¹
Velocity:	15 m/min
Z Feed Rate:	50 mm/min
Chip Load:	0.00625 mm/rev
Peck Amount:	0.12 mm/time
Hole Depth:	2.4 mm
Number of Holes:	500 holes
Drilling Time:	25 min/100 holes
Overhang Length:	10 mm
Coolant:	Water Soluble (Nozzle)

Process Form


* Blind Hole Step Process

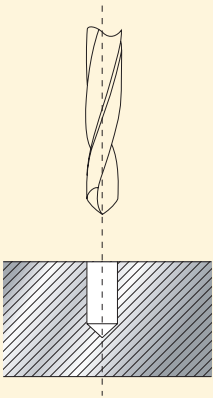

Comparison of Tip Damage

	Before use	After 250 hits	After 500 hits
UT C-UMD 2060-070 $\phi 0.6$ Flute Length 7 mm Ti-Composite Membrane			
Company A High Speed Steel Drill $\phi 0.6$ Flute Length 7 mm TiN			


Comparison of Hole Position

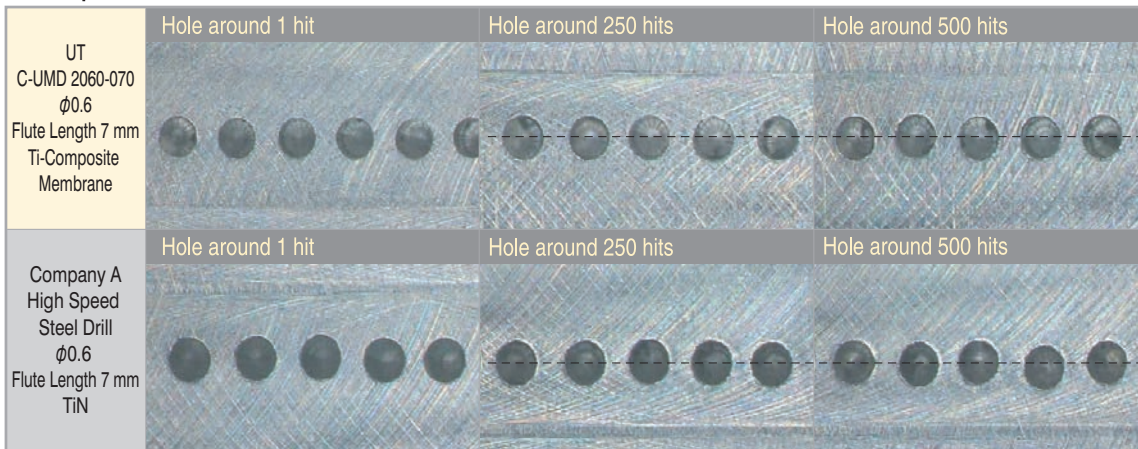

Drilling Example 2

SUS304

$\phi 0.1$ Drilling (about 800 holes)

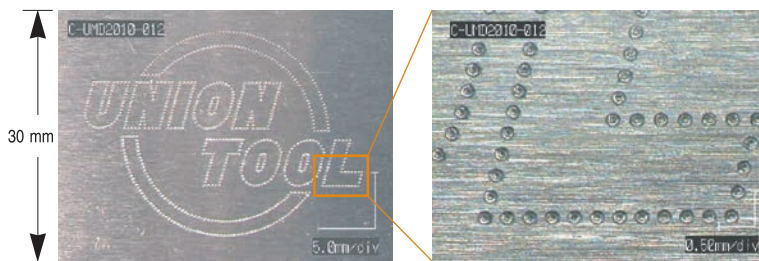

	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Peck Amount (mm/time)	Hole Depth (mm)	Drilling Time	Coolant	Note
Acrylic $\phi 0.1$							
C-UMD $\phi 0.1$	20,000	20	0.02	1.00	1 h 30 min	Air Blow	Without pilot hole drilling
SUS304 (1.4301) $\phi 0.1$							
Center Drill+Chamfering C-UMD $\phi 0.2$	10,000	2	0.01	0.05	2 h 50 min	Water Soluble	
Drilling C-UMD $\phi 0.1$	12,000	4	0.02	0.20	3 h 27 min	Water Soluble	
Aluminum (A5052) $\phi 0.2$							
C-UMD $\phi 0.2$	16,000	80	0.04	1.50	2 h 50 min	Water Soluble	Using back-up board
NAK55 (AISI P21) $\phi 0.3$							
C-UMD $\phi 0.3$	15,000	15	0.06	1.50	3 h 35 min	Water Soluble	With pilot hole drilling
SUS304 (1.4301) $\phi 0.3$							
C-UMD $\phi 0.3$	16,000	30	0.06	1.50	2 h 24 min	Water Soluble	With pilot hole drilling

2 Flutes

$\phi 3$ mm Shank
V Series

UDC-PCD
Series

CBN
Series

Square
Long Neck
Square

Radius
Long Neck
Radius

Taper Neck
Radius

Ball / Long
Shank Ball
Long Neck
Ball

Taper Neck
Ball

Taper
Taper

Barrel

Spiral
V Cutter

Drill

Technical Data


UTDLX



Work Material																	
Structural Steels	Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels				Cast Iron	Aluminum Alloys	Graphite	Copper	Plastics	Glass Filled Plastics	Titanium Alloys	Heat Resistant Alloys	Cemented Carbide	Hard Brittle (Non-Metallic) Materials
				~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC										
SS400	S45C S55C	SK / SCM SUS	NAK HPM	~ 50HRC	~ 55HRC	~ 60HRC	~ 65HRC	~ 70HRC									
●	●	●	○	Contact sales when drilling over 45HRC.				○	●		○			○	○		

A highly efficient and economic drill for both mass and prototype production of parts. UT MICRO COAT offers excellent performance for cutting soft materials. The new drill design and X thinning offer stable drilling performance with increased tool life. The 130° point angle ensures reduced burring of the drilled hole. With an aspect ratio of 15:1, the drill is ideal for deep hole drilling, that requires high accuracy.

Diameter Tolerance: 0/-0.01 mm
Point Angle: 130°



Unit (mm)

Model Number	Diameter φD	Flute Length ℓ	Overall Length L	Shank Diameter φd	Suggested Retail Price ¥
UTDLX 2030-045	0.3	4.5	38	3	4,600
UTDLX 2035-053	0.35	5.3	38	3	5,130
UTDLX 2040-060	0.4	6	38	3	4,600
UTDLX 2045-068	0.45	6.8	38	3	5,130
UTDLX 2050-075	0.5	7.5	38	3	4,600
UTDLX 2055-083	0.55	8.3	38	3	5,130
UTDLX 2060-090	0.6	9	45	3	4,600
UTDLX 2065-098	0.65	9.8	45	3	5,290
UTDLX 2070-105	0.7	10.5	45	3	4,600
UTDLX 2075-113	0.75	11.3	45	3	5,290
UTDLX 2080-120	0.8	12	45	3	4,600
UTDLX 2085-128	0.85	12.8	45	3	5,290

Next Page ➡

Unit (mm)

Model Number	Diameter ϕD	Flute Length ℓ	Overall Length L	Shank Diameter ϕd	Suggested Retail Price ¥
UTDLX 2090-135	0.9	13.5	45	3	4,600
UTDLX 2095-143	0.95	14.3	45	3	5,290
UTDLX 2100-150	1	15	50	3	4,600
UTDLX 2105-158	1.05	15.8	50	3	4,600
UTDLX 2110-165	1.1	16.5	50	3	4,600
UTDLX 2115-173	1.15	17.3	50	3	4,600
UTDLX 2120-180	1.2	18	50	3	4,600
UTDLX 2125-188	1.25	18.8	50	3	4,600
UTDLX 2130-195	1.3	19.5	50	3	4,600
UTDLX 2135-203	1.35	20.3	60	3	4,600
UTDLX 2140-210	1.4	21	60	3	4,600
UTDLX 2145-218	1.45	21.8	60	3	4,600
UTDLX 2150-225	1.5	22.5	60	3	4,600
UTDLX 2155-233	1.55	23.3	60	3	4,600
UTDLX 2160-240	1.6	24	60	3	4,600
UTDLX 2165-248	1.65	24.8	60	3	4,970
UTDLX 2170-255	1.7	25.5	60	3	4,970
UTDLX 2175-263	1.75	26.3	60	3	4,970
UTDLX 2180-270	1.8	27	60	3	4,970
UTDLX 2185-278	1.85	27.8	60	3	4,970
UTDLX 2190-285	1.9	28.5	60	3	4,970
UTDLX 2195-293	1.95	29.3	60	3	4,970
UTDLX 2200-300	2	30	60	3	4,970
UTDLX 2205-308	2.05	30.8	80	3	6,640
UTDLX 2210-315	2.1	31.5	80	3	5,500
UTDLX 2215-323	2.15	32.3	80	3	6,640
UTDLX 2220-330	2.2	33	80	3	5,500
UTDLX 2225-338	2.25	33.8	80	3	6,640
UTDLX 2230-345	2.3	34.5	80	3	5,500
UTDLX 2235-353	2.35	35.3	80	3	6,640
UTDLX 2240-360	2.4	36	80	3	5,500
UTDLX 2245-368	2.45	36.8	80	3	6,640
UTDLX 2250-375	2.5	37.5	80	3	5,500
UTDLX 2255-383	2.55	38.3	80	3	6,640
UTDLX 2260-390	2.6	39	80	3	5,500
UTDLX 2265-398	2.65	39.8	80	3	6,640
UTDLX 2270-405	2.7	40.5	80	3	5,500
UTDLX 2275-413	2.75	41.3	80	3	6,640
UTDLX 2280-420	2.8	42	80	3	5,500
UTDLX 2285-428	2.85	42.8	80	3	6,640
UTDLX 2290-435	2.9	43.5	80	3	5,500
UTDLX 2295-443	2.95	44.3	80	3	6,640
UTDLX 2300-450	3	45	80	3	5,500

$\phi 3\text{mm}$ Shank
V Series

UDC-PCD
Series

CBN
Series

Square

Square
Long Neck
Square

Radius

Radius
Long Neck
Radius
Taper Neck
Radius

Ball

Ball / Long
Shank Ball
Long Neck
Ball
Taper Neck
Ball

Taper

Taper

Barrel

Spiral
V Cutter

Drill


Technical Data

Drilling Conditions for UTDLX

WORK MATERIAL	STRUCTURAL STEELS SS400		CARBON STEELS S50C		ALLOY STEELS SCM / SUS		ALUMINUM ALLOYS A5052	
Velocity	Vc=20~40 m/min		Vc=20~40 m/min		Vc=15~40 m/min		Vc=25~60 m/min	
Diameter (mm)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)	Spindle Speed (min ⁻¹)	Feed Rate (mm/min)
0.3	20,000	50	20,000	50	16,000	40	20,000	650
0.35	19,000	60	19,000	60	13,600	50	20,000	700
0.4	18,000	80	18,000	80	11,900	50	20,000	800
0.45	17,000	100	17,000	100	10,600	60	20,000	850
0.5	16,000	120	16,000	120	9,500	60	20,000	920
0.55	15,000	140	15,000	140	9,000	70	20,000	1,050
0.6	14,100	140	14,100	140	7,900	70	19,900	1,150
0.7	12,800	140	12,800	140	6,800	70	19,900	1,230
0.8	11,900	140	11,900	140	6,000	70	19,900	1,310
0.9	10,500	140	10,500	140	6,200	70	17,600	1,350
1	9,500	150	9,500	150	6,400	70	15,900	1,400
1.5	7,200	150	7,200	150	5,500	70	12,000	1,470
2	5,600	150	5,600	150	5,000	70	9,500	1,590
2.5	4,500	150	4,500	150	4,400	70	7,600	1,640
3	4,000	150	4,000	150	3,800	70	6,400	1,700
Peck Amount	0.5D		0.3D		0.1D		0.3D	

Note:

- Apply pre-drilling more than 3D depth before deep drilling. Recommend UTDSX for pre-drilling.
- Recommend shallower drilling than flute length (under $\phi 1:1D$, $\phi 1$ and over: 0.5D).
- Recommend water soluble or oil coolant.
- Recommend oil coolant for Titanium Alloys and Heat Resistant Alloys.

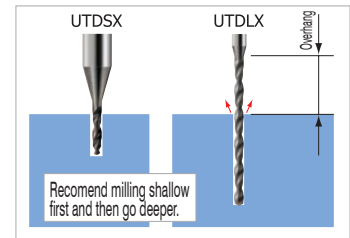

Comparison of UTD (Carbide) and HSS Drill Bit

SUS420J2 (Raw Material)

UTD can drill more than 2X holes compared to an HSS model

Tool Size	φ1.32 × 12 UTD proto type
Spindle Speed	5,000 min ⁻¹ (Vc: 21 m/min)
Feed Rate	200 mm/min (f: 0.04 mm/rev.)
Peck Amount	1.3 mm
Depth	7 mm blind hole

UTD prototype

Before use




After 1,000 hits



After 2,000 hits



After 3,000 hits

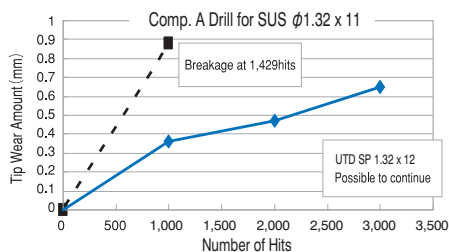

Flank wear comparison with HSS

HSS Drill (Company A: φ3 shank diameter with TiN coating for SUS)


Before use



After 1,000 hits



Breakage at 1,429 hits




Drilling test with various materials (Comparison of with / without thinning)

Smooth chip evacuation using the X-thinning design, offers greater resistance to breakage and more accurate drilling


Drill Size : φ1.0 x 15

Tool : UTDLX 2100-150 (with thinning)


Test Tool: φ1.0 x 15 (without thinning)




SS400




Spindle Speed	9,500 min ⁻¹ (Vc: 30 m/min)
Feed Rate	400 mm/min (f: 0.042 mm/rev.)
Peck Amount	0.2 mm
Depth	14 mm blind hole




A5052




Spindle Speed	15,900 min ⁻¹ (Vc: 50 m/min)
Feed Rate	1,500 mm/min (f: 0.094 mm/rev.)
Peck Amount	0.7 mm
Depth	14 mm blind hole



SUS304



Spindle Speed	6,400 min ⁻¹ (Vc: 20 m/min)
Feed Rate	150 mm/min (f: 0.023 mm/rev.)
Peck Amount	0.2 mm
Depth	14 mm blind hole



φ3mm Shank
V Series

UDC-PCD
Series

CBN
Series

Square

Long Neck
Square

Radius

Long Neck
Radius

Taper Neck
Radius

Ball / Long
Shank Ball

Long Neck
Ball

Taper Neck
Ball

Taper

Barrel

Spiral
V Cutter

Drill

Technical Data